

FEATHER-LIGHT STEEL-TOUGH



Galaxy Series

BMT-G4/088A | 335W

Ideal for C&I Roof Tops/ Patio/Pergola/Shed & Solar Trailer/Flat Roof

Galaxy Series is a featherlight BIPV (building-integrated photovoltaic) product designed for industrial and commercial applications. With an ultra-lightweight design and frameless surface, Galaxy is especially ideal for low load-bearing and poor waterproofing roofs while ensuring power generation efficiency. It is worth mentioning that the 1.6mm ultra-thin glass is added to Galaxy, which greatly helps improve its ability to resist strong impact from wind and hail, bringing durability and safety to buildings with all-weather protection. Furthermore, various installation methods and the integrated design also enable rapid and streamlined installation, resulting in significant cost savings out of reduced labor time.



Ultra-lightweight

- The lightest weighs 5.6 kg/m²
- Up to 60% lighter than conventional module
- Suitable for roofs with a low load-bearing capacity



Quick Installation

- No roof penetration
- 3 Min/pcs rapid installation
- Glue for flat roofs



High Reliability

- Wind¹ and hail² impact resistance
- Maximum static snow load up to 2400Pa
- Enhanced capability for self-cleaning
- Reduced fire risks

¹Third-party lab test from CTC


²Third-party TUV lab: report number CN2226P8 001



High Power Generation

- High-efficiency PERC cells
- 2% less generation loss³ with ventilation design
- Up to 204W per square meter of power generation


³Based on internal lab test

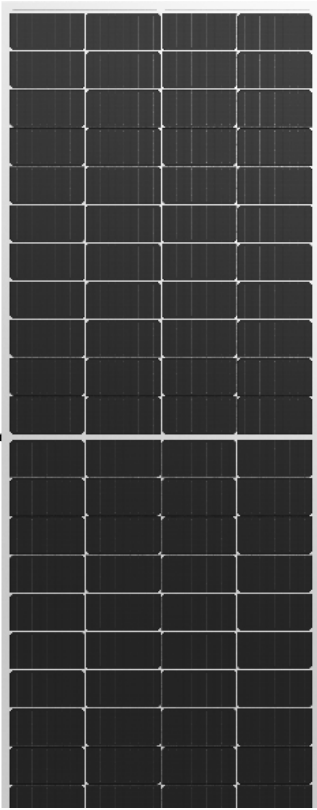

BMT-G4/088A

30-year power generation performance guarantee

- ✓ 2% degradation in the first year
- ✓ 12-year product warranty
- ✓ 0.55% decay per year
- ✓ 30-year power guarantee

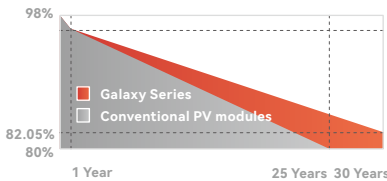

Structural Data

BMT-G4/088A

Size	2116±2*777±2*3.5±1mm
Weight	9.2±0.7kg
Unit Weight	5.6±0.4kg/m ²
Front Surface	1.6mm tempered glass
Cell Type	Mono PERC Half Cells (88pcs)
Frame	Frameless

Electrical Data (STC)

Max Power (Pmax)	335W
Power/m ² (W/m ²)	204W/m ²
Efficiency (%)	20.4%
Voltage at Max Power (Vmpp)	25.68V
Voltage at Open Circuit (Voc)	30.47V
Current at Max Power (Impp)	13.05A
Current at Short Circuit (Isc)	13.88A

Load Capacity

Maximum static load on the front	2400Pa
Maximum static load on rear side	2400Pa

Working Parameters

Maximum System Voltage	1500V
Maximum Fuse Rating Operation	25A
Temperature Range	-40° C ~+85° C
Hail Test	Hail diameter: 25mm Specified speed: 23m/s
The Rated Operating Temperature	45±2°C
Fire-resistant Class	C
Protection Class	II

Temperature Parameters

Isc TP	0.048%/°C
Voc TP	-0.28%/°C
Pmp TP	-0.35%/°C

